






The colour ochre in the BLOQ logo refers to the rushes and the colour palette of the Golden Age in Holland

Our story

Being part of Betap, BLOQ can build on more than 100 years of experience in the flooring sector. Betap grew from a local manufacturer of rush mats in 1918 to an internationally renowned carpet manufacturer.

Working with some of the most reputable architects, designers and commercial carpet partners, Betap's high-traffic commercial carpet is used across the world in prestigious office buildings, hotels, universities, museums and various leisure applications. Betap is your partner of choice for commercial carpet.



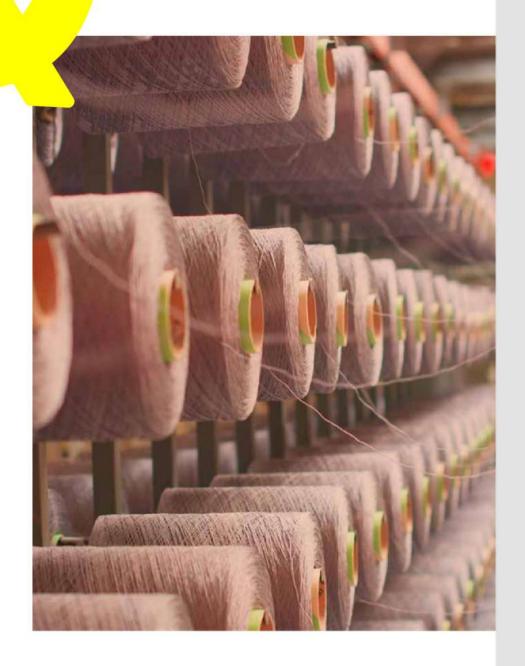

High-end production line

Group Betap is an innovative carpet manufacturer in Genemuiden (The Netherlands) with a vertically integrated production line for tufted and non-woven floor coverings, as well as an own yarn production line.

With BLOQ, we are developing and producing creative carpet tiles that comply with the stringent regulations for the commercial market. We offer high-performance tiles focused on office projects, that are sound absorbing and have the best results in fire safety. Our products are also produced following the strictest standards in sustainability.






Inspired by natural elements, The Textured collection plays with soft tones and textures. The collection is based on coarsely woven fabrics known for their timeless look, such as linnen.



The Textured


















CANVAS

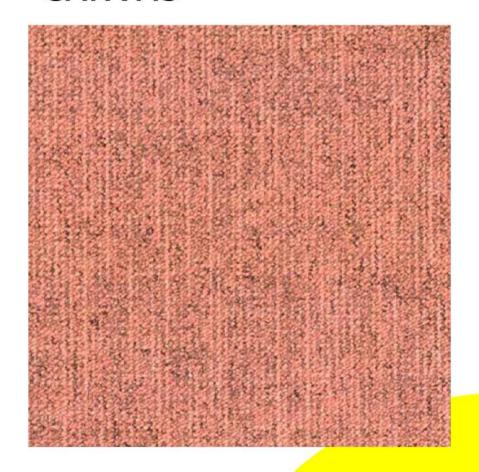




Inspiration is everywhere




Natural feel

CANVAS measures 50 x 50 cm and is part of The Textured collection, a group of carpet tiles with a tactile and visible structure. The tile boasts proportional patterns in 18 natural pastel colours reflecting openness, softness, calmness and composure.

Looking for a natural look and feel?

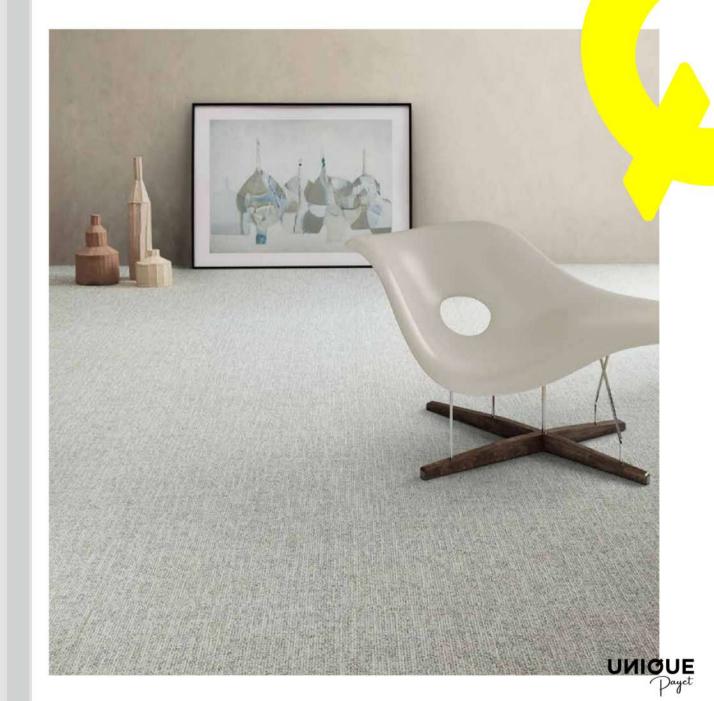

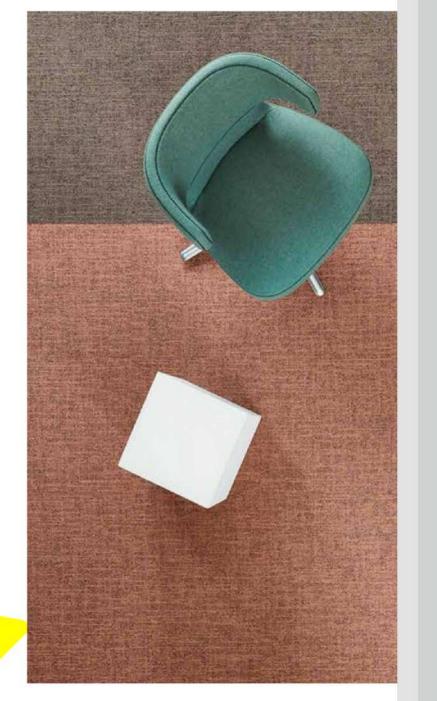









220 MELON 820 TIMBER

colour range

CANVAS comes in 18 natural, pastel colours. Soft hues and deeper tones, but all gentle moods. Use them in one colour tone or mix with complementary colours, according to your taste. The general feeling with pastels is one of openness, softness, calmness and composure

CANVAS feels like a beautiful garden of soft flower tones.







Pure or mixed



Use the colours pure in one colour tone or dare to mix with other tones. Soft hues stimulate a homely feeling at work, current colours meet today's trends.



INSPIRATION GUIDE
























Highlights



DIMENSIONAL STABILITY & HIGH PERFORMANCE

BLOQ uses glass fiber fleece, which gives more dimensional stability (< 0.2%). The durable quality is guaranteed by multiple certifications:

- Commercial heavy dassification (Class 33 - EN 1307)
- Suitable for castor chairs (EN 985)
- Colour fastness to light (EN ISO 105-B02)

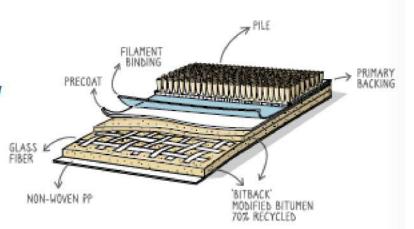



SOLUTION DYED YARNS

BLOQ uses 100% Polyamide 6 Solution Dyed Nylon from **Aquafil**, the best and leading supplier for carpet manufacturers. Solution dyed means **better colour fastness** and the best results to light and water.

LIGHT REFLECTANCE VALUES

Light Reflectance Value (LRV) is a scale that measures visible and usable light reflected from an illuminated surface. The percentage identifies how much light a colour reflects or absorbs. 0% reflects no visible light, 100% reflects all light.

COLOUR	LRV_	L
140	37.90	67.95
145	28.24	60.11
150	25.42	57.49
220	17.79	49.23
225	18.63	50.25
230	18.49	50.08
310	8.34	34.69
415	10.71	39.08
535	16,69	47.87

COLOUR	LRV,,	L
540	11.23	39.97
625	14.99	45.62
815	12.05	41.29
820	10.62	38.93
935	8.90	35.80
955	28.33	60.19
960	13.91	44.10
965	9.91	37.69
970	16.59	47.75

BLOQ

creative carpet tiles





THE TEXTURED CANVAS

SPECIFICATIONS

TYPE OF MANUFACTURE Tufted Patterned Loop Pile 1/10"

ISO 2424

PILE FIBER COMPOSITION 100% Polyamide 6

ISO 2424 Solution Dyed Nylon made by Aquafil

SECONDARY BACKING Bitback, Modified Bitumen

ISO 2424 70% Recycled Content

DIMENSION 50 x 50 cm

EN ISO 24342

PILE WEIGHT 690 g/m²

ISO 8543

SURFACE PILE WEIGHT 450 g/m2

130 8543

TOTAL WEIGHT 4 400 g/m²

190 8543

TOTAL THICKNESS 6.4 mm

ISO 1765

PILE HEIGHT 3.1 mm

ISO 1766

PILE DENSITY 0.145 g/m³

ISO 8543

NUMBER OF TUFTS 152 000 /m2

ISO 1763

DIMENSIONAL STABILITY < 0.2%

190 2551

NUMBER 18

OF COLOURS

PACKAGING Box: 20 tiles / 5 m²

Pallet: 200 m2

PERFORMANCE

CLASSIFICATION 33

EN 1307

LUXURY RATING LC2

EN 1307

CASTOR CHAIR RATING A: Intensive use

EN 985

FIRE CLASSIFICATION B,-s1

EN 13501-1

IMPACT SOUND INSULATION AL,: 24 dB

EN ISO 10140-3

SOUND ABSORBTION Frequency Hz 125 250 500 1000 2000 4000 FM ISO 354 0 0 0.00 0.00 0.05 0.15 0.35 0.45

EN ISO 354 °

NOISE REDUCTION og: 0.15

EN ISO 354 PERMANENT ANTISTATIC < 2 kV

ISO 6356

TRANSVERSAL RESISTANCE 4 1 X 10° Ohm

ISO 10965

THERMAL RESISTANCE 0.079 m² K/W

ISO 8302

COLOUR FASTNESS TO LIGHT ≥ 7

EN ISO 105-B02

COLOUR FASTNESS TO WATER > 4

EN ISO 105-E01

RUBBING FASTNESS > 4

EN ISO 105-X12

GUT Nº PRODIS 9AB925EB













